

size:14. 5x20. 4cm



Folding Welding Table

*tools not included

Manufactured for:
Arrows Corporation Ltd
Industry Road, Heaton, Newcastle Upon Tyne, NE6 5XB
Tel: 0191 2966966, Email: info@arrows-uk.com
www.arrows-uk.com

WARRANTY

This product is covered by a limited one (1) year parts warranty against defects in manufacture and materials. Should the product become defective please return it to the store from which you purchased it and either replacement parts will be issued or it will be replaced free of charge.

This warranty does not cover defects caused by misuse.

Any alteration or modification of this product will void the warranty.


No responsibility is accepted for incorrect use of this product.

Assembly Instructions



Tools not included. Maximum load capacity 150kg

Parts List:

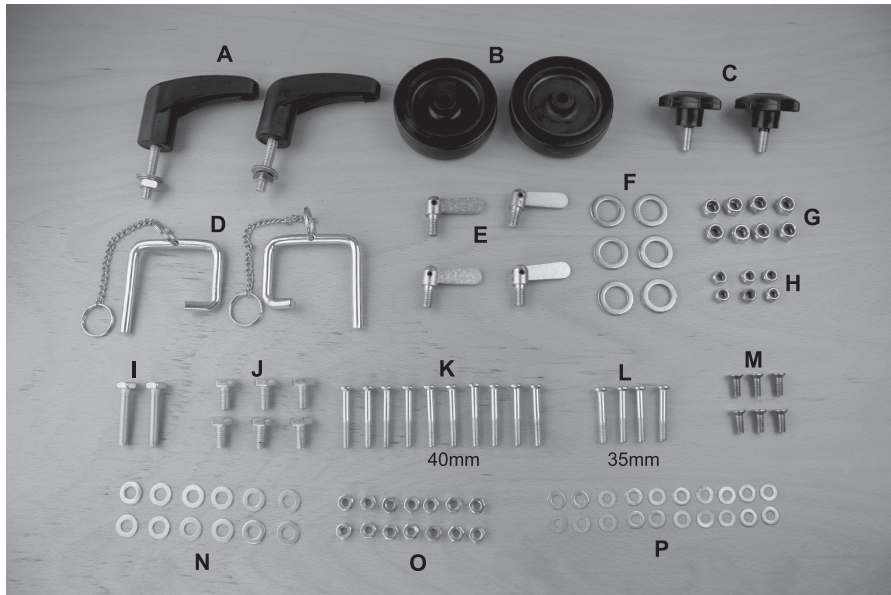


- A: 2 x Handle
B: 2 x Wheel
C: 2 x Height Fixing Knob
D: 2 x Safety Lock Pin
E: 4 x Fixing Bolt
F: 6 x Washer
G: 8 x Nylon Nut M8
H: 6 x Nylon Nut M6

I : 2 x Hex Bolt M8
J : 6 x Hex Bolt M8
K: 10 x Bolt M6
L: 4 x Bolt M6
M: 6 x Bolt M6
N: 12 x Washer
O: 14 x Nut M6
P: 20 x Washer


Assembly Steps:

1. Position washers (6 x F) on the back bench top.

2. Attach the frames to the both sides of the back bench top with bolts (6 x M), washers (6 x P) and nylon nuts (6 x H).

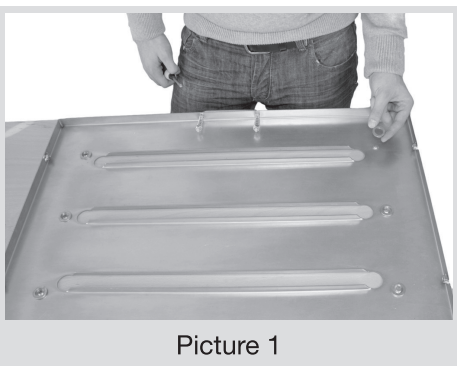

Picture 1

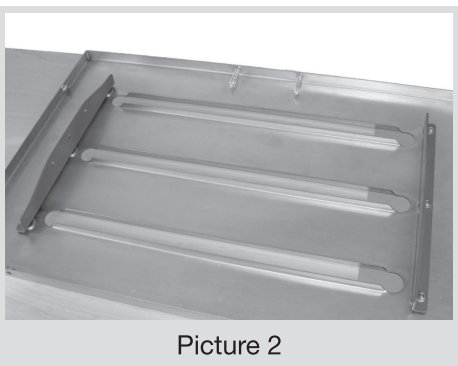


Picture 2

3. Insert the handles (2 x A) through the elevating rods and fix the handles.

4. Attach the paddles to the front and back legs through the pre-drilled holes using the bolts (10 x K), washers (10 x P) and nuts (10 x O).Fix cross bar to the two elevating rods with bolts (4 x L), washers (4 x P) and nuts (4 x O).




Picture 3

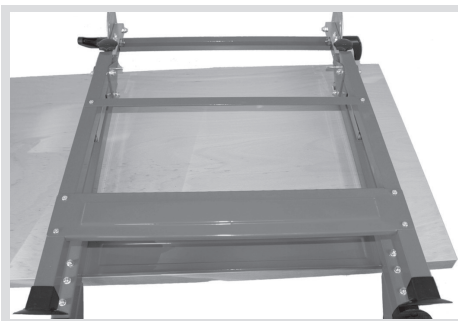

Picture 4

5. Lay the two elevating rods onto the frame. Attach using hex bolts (6 x J), washers (6 x N) and nylon nuts (6 x G). Fix the wheels (2 x B) to the wheel frames with hex bolts (2 x I), washers (2 x N) and nylon nuts (2 x G).

6. Insert safety lock pins (2 x D) and attach the height fixing knobs (2 x C) to both legs and tighten. Adjust the height of the bench using safety lock pins and height fixing knobs.

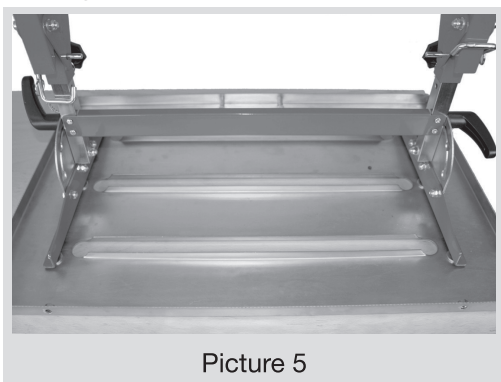

Picture 5



Picture 6

7. Attach the guide frame to both sides of the bench top using fixing bolts (4 x E) and washers (4 x N).



Picture 7

NOTE: Once the initial assembly has finished, re-tighten all nuts and bolts to ensure none of them have loosened in the assembly process.